

MV-ID2013EM

1.3 MP Industrial Code Reader



RoHS



Introduction

MV-ID2013EM industrial code reader can read different types of 1D and 2D codes, and its max. reading speed reaches 30 codes/sec. It adopts deep learning algorithm to process images with good robustness, and can recognize various codes.

Applicable Industry


Manual or semi-automated workstation in low-speed and static scenarios, etc.

Key Feature


- Built-in deep learning algorithm to read codes with good robustness.
- Compact design and small in size.
- Adopts multiple IO interfaces and plug-in power interface.
- Adopts LED aiming light to help aim codes.
- Adopts buzzer and indicator for indicating device status.
- Supports one-click parameter adjustment for convenient operation.

Dimension

Cable on the bottom

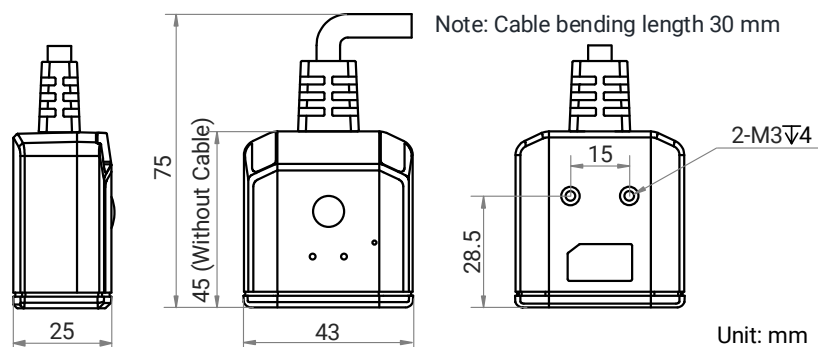

Cable on the side Note: Cable bending length 30 mm

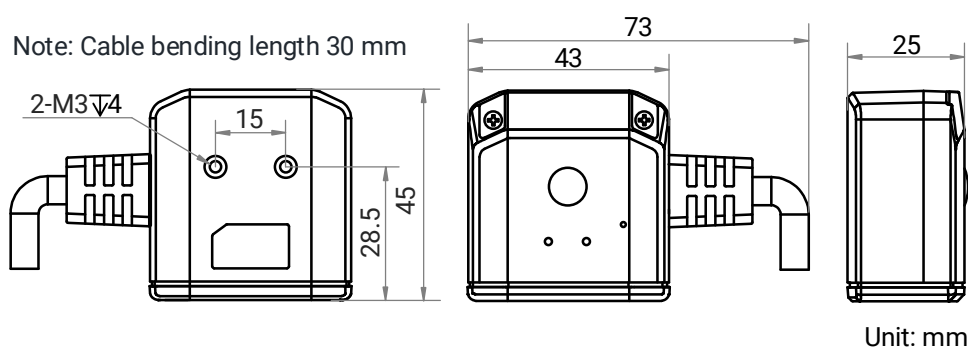

Specification

| Model | MV-ID2013EM-05-RBN(-U/-S/-SU) | MV-ID2013EM-05-RBP(-U/-S/-SU) | MV-ID2013EM-05-WBN(-U/-S/-SU) | MV-ID2013EM-05-WBP(-U/-S/-SU) |
|------------------------|--|-------------------------------|-------------------------------|-------------------------------|
| Performance | | | | |
| Symbologies | 1D codes: Code 39, Code 93, Code 128, ITF 14, ITF 25, CodaBar, EAN, UPCA, UPCE | | | |
| | 2D codes: QR Code, Data Matrix | | | |
| Max. frame rate | 50 fps | | | |
| Max. reading speed | 30 codes/sec | | | |
| Sensor type | CMOS, global shutter | | | |
| Pixel size | 2.7 μm × 2.7 μm | | | |
| Sensor size | 1/4" | | | |
| Resolution | 1280 × 1024 | | | |
| Exposure time | 60 μs to 0.6 sec | | | |
| Gain | 1 dB to 28 dB | | | |
| Mono/color | Mono | | | |
| Communication protocol | Network interface: SmartSDK, TCP Client, Serial, FTP, TCP Server, UDP, Profinet, Ethernet/IP | | | |
| | USB interface: SmartSDK, USB (HID, CDC) | | | |
| Depth of field* | Code 39 (5 mil): 75 mm to 215 mm | | | |
| | Code 128 (10 mil): 50 mm to 400 mm | | | |
| | EAN 13 (13 mil): 60 mm to 420 mm | | | |
| | QR Code (15 mil): 40 mm to 290 mm | | | |
| | Data Matrix (10 mil): 50 mm to 240 mm | | | |
| Electrical feature | | | | |
| Data interface | Network interface: Fast Ethernet (100 Mbit/s), RS-232, DC terminal | | | |
| | USB interface: USB 2.0 | | | |
| Digital I/O | Network interface: DB15 connector provides power and I/O, including non-isolated input × 2 (Line 0/1), non-isolated output × 2 (Line 2/3), RS-232 × 1. USB interface: DB15 connector provides data transmission. Supports device triggering via pressing button on side. | | | |
| Power supply | Network interface: 12 VDC to 24 VDC; USB interface: 5 VDC (USB 2.0 provides power supply) | | | |
| Max. power consumption | Network interface: 2.5 W @ 12 VDC; USB interface: 2.5 W @ 5 VDC | | | |
| Mechanical | | | | |
| Focal length | 4.7 mm | | | |
| Lens mount | M5.8-mount | | | |
| Ambient illumination | 0 lux to 10000 lux | | | |
| Light source | Red | Red (polarized) | White | White (polarized) |
| Aiming system | Green LED | | | |
| Indicator | Power indicator (POWER), status indicator (OK/NG) | | | |
| Dimension | 45 mm × 43 mm × 25 mm (1.8" × 1.7" × 1.0") | | | |
| Weight | Approx. 68.5 g (0.2 lb.) | | | |
| Ingress protection | IP54 | | | |
| Temperature | Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: −30 °C to 70 °C (−22 °F to 158 °F) | | | |
| Humidity | 20% RH to 95% RH (no condensation) | | | |
| General | | | | |
| Client software | IDMVS | | | |
| Certification | CE, RoHS, KC | | | |

Specification

| Model | MV-ID2013EM-05H-RBN(-U/-S/-SU) | MV-ID2013EM-05H-RBP | MV-ID2013EM-05N-RBN(-U/-S/-SU) | MV-ID2013EM-05N-RBP |
|------------------------|--|---------------------|--|---------------------|
| Performance | | | | |
| Symbologies | 1D codes: Code 39, Code 93, Code 128, ITF 14, ITF 25, CodaBar, EAN, UPCA, UPCE | | | |
| | 2D codes: QR Code, Data Matrix | | | |
| Max. frame rate | 50 fps | | | |
| Max. reading speed | 30 codes/sec | | | |
| Sensor type | CMOS, global shutter | | | |
| Pixel size | 2.7 μm × 2.7 μm | | | |
| Sensor size | 1/4" | | | |
| Resolution | 1280 × 1024 | | | |
| Exposure time | 60 μs to 0.6 sec | | | |
| Gain | 1 dB to 28 dB | | | |
| Mono/color | Mono | | | |
| Communication protocol | Network interface: SmartSDK, TCP Client, Serial, FTP, TCP Server, UDP, Profinet, Ethernet/IP | | | |
| | USB interface: SmartSDK, USB (HID, CDC) | | | |
| Depth of field* | Code 39 (3 mil): 35 mm to 65 mm Code 39 (5 mil): 30 mm to 75 mm EAN 13 (13 mil): 55 mm to 105 mm Data Matrix (5 mil): 30 mm to 65 mm Data Matrix (10 mil): 25 mm to 90 mm Code 128 (10 mil): 25 mm to 105 mm QR Code (10 mil): 25 mm to 95 mm | | Code 39 (3 mil): 45 mm to 90 mm Code 39 (5 mil): 35 mm to 105 mm EAN 13 (13 mil): 50 mm to 125 mm Data Matrix (5 mil): 40 mm to 80 mm Data Matrix (10 mil): 25 mm to 125 mm Code 128 (10 mil): 40 mm to 140 mm QR Code (10 mil): 30 mm to 120 mm | |
| | | | | |
| Electrical feature | | | | |
| Data interface | Network interface: Fast Ethernet (100 Mbit/s), RS-232, DC terminal | | | |
| | USB interface: USB 2.0 | | | |
| Digital I/O | Network interface: DB15 connector provides power and I/O, including non-isolated input × 2 (Line 0/1), non-isolated output × 2 (Line 2/3), RS-232 × 1. USB interface: DB15 connector provides data transmission. Supports device triggering via pressing button on side. | | | |
| Power supply | Network interface: 12 VDC to 24 VDC; USB interface: 5 VDC (USB 2.0 provides power supply) | | | |
| Max. power consumption | Network interface: 2.5 W @ 12 VDC; USB interface: 2.5 W @ 5 VDC | | | |
| Mechanical | | | | |
| Focal length | 4.7 mm | | | |
| Lens mount | M5.8-mount | | | |
| Ambient illumination | 0 lux to 10000 lux | | | |
| Light source | Red | Red (polarized) | Red | Red (polarized) |
| Aiming system | Green LED | | | |
| Indicator | Power indicator (POWER), status indicator (OK/NG) | | | |
| Dimension | 45 mm × 43 mm × 25 mm (1.8" × 1.7" × 1.0") | | | |
| Weight | Approx. 68.5 g (0.2 lb.) | | | |
| Ingress protection | IP54 | | | |
| Temperature | Working temperature: 0 °C to 50 °C; storage temperature: −30 °C to 70 °C | | | |
| Humidity | 20% RH to 95% RH (no condensation) | | | |
| General | | | | |
| Client software | IDMVS | | | |
| Certification | CE, RoHS, KC | | | |

Specification

| Model | MV-ID2013EM-03N-RBN | MV-ID2013EM-03N-RBP |
|------------------------|---|---------------------|
| Performance | | |
| Symbologies | 1D codes: Code 39, Code 93, Code 128, ITF 14, ITF 25, CodaBar, EAN, UPCA, UPCE | |
| | 2D codes: QR Code, Data Matrix | |
| Max. frame rate | 50 fps | |
| Max. reading speed | 30 codes/sec | |
| Sensor type | CMOS, global shutter | |
| Pixel size | 2.7 μm × 2.7 μm | |
| Sensor size | 1/4" | |
| Resolution | 1280 × 1024 | |
| Exposure time | 60 μs to 0.6 sec | |
| Gain | 1 dB to 28 dB | |
| Mono/color | Mono | |
| Communication protocol | SmartSDK, TCP Client, Serial, FTP, TCP Server, UDP, Profinet, Ethernet/IP | |
| Depth of field* | Code 39 (5 mil): 40 mm to 120 mm Code 128 (10 mil): 15 mm to 250 mm EAN 13 (13 mil): 30 mm to 280 mm QR Code (10 mil): 35 mm to 155 mm QR Code (15 mil): 15 mm to 215 mm QR Code (20 mil): 15 mm to 270 mm | |
| Electrical feature | | |
| Data interface | Fast Ethernet (100 Mbit/s), RS-232, DC terminal | |
| Digital I/O | DB15 connector provides power and I/O, including non-isolated input × 2 (Line 0/1), non-isolated output × 2 (Line 2/3), RS-232 × 1. Supports device triggering via pressing button on side. | |
| Power supply | 12 VDC to 24 VDC | |
| Max. power consumption | 2.5 W @ 12 VDC | |
| Mechanical | | |
| Focal length | 2.45 mm | |
| Lens mount | M5.4-mount | |
| Ambient illumination | 0 lux to 10000 lux | |
| Light source | Red | Red (polarized) |
| Aiming system | Green LED | |
| Indicator | Power indicator (POWER), status indicator (OK/NG) | |
| Dimension | 45 mm × 43 mm × 25 mm (1.8" × 1.7" × 1.0") | |
| Weight | Approx. 68.5 g (0.2 lb.) | |
| Ingress protection | IP54 | |
| Temperature | Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: −30 °C to 70 °C (−22 °F to 158 °F) | |
| Humidity | 20% RH to 95% RH (no condensation) | |
| General | | |
| Client software | IDMVS | |
| Certification | CE, RoHS, KC | |

*Test condition: Environment temperature=25 $^{\circ}\text{C}$ (77 $^{\circ}\text{F}$), ambient illumination=250 lux filament lamp, sample symbologies are used.

Available Model

- 4.7 mm focal length, standard distance, red light, network interface: MV-ID2013EM-05-RBN
- 4.7 mm focal length, standard distance, red light (polarized), network interface: MV-ID2013EM-05-RBP
- 4.7 mm focal length, standard distance, white light, network interface: MV-ID2013EM-05-WBN
- 4.7 mm focal length, standard distance, white light (polarized), network interface: MV-ID2013EM-05-WBP
- 4.7 mm focal length, standard distance, red light, USB interface: MV-ID2013EM-05-RBN-U
- 4.7 mm focal length, standard distance, red light (polarized), USB interface: MV-ID2013EM-05-RBP-U
- 4.7 mm focal length, standard distance, white light, USB interface: MV-ID2013EM-05-WBN-U
- 4.7 mm focal length, standard distance, white light (polarized), USB interface: MV-ID2013EM-05-WBP-U
- 4.7 mm focal length, high density, red light, network interface: MV-ID2013EM-05H-RBN
- 4.7 mm focal length, high density, red light (polarized), network interface: MV-ID2013EM-05H-RBP
- 4.7 mm focal length, high density, red light, USB interface: MV-ID2013EM-05H-RBN-U
- 4.7 mm focal length, near distance, red light, network interface: MV-ID2013EM-05N-RBN
- 4.7 mm focal length, near distance, red light (polarized), network interface: MV-ID2013EM-05N-RBP
- 4.7 mm focal length, near distance, red light, USB interface: MV-ID2013EM-05N-RBN-U
- 4.7 mm focal length, standard distance, red light, side cable, network interface: MV-ID2013EM-05-RBN-S
- 4.7 mm focal length, standard distance, red light (polarized), side cable, network interface: MV-ID2013EM-05-RBP-S
- 4.7 mm focal length, standard distance, red light, side cable, USB interface: MV-ID2013EM-05-RBN-SU
- 4.7 mm focal length, standard distance, red light (polarized), side cable, USB interface: MV-ID2013EM-05-RBP-SU
- 4.7 mm focal length, high density, red light, side cable, network interface: MV-ID2013EM-05H-RBN-S
- 4.7 mm focal length, high density, red light, side cable, USB interface: MV-ID2013EM-05H-RBN-SU
- 4.7 mm focal length, near distance, red light, side cable, network interface: MV-ID2013EM-05N-RBN-S
- 4.7 mm focal length, near distance, red light, side cable, USB interface: MV-ID2013EM-05N-RBN-SU
- 2.45 mm focal length, near distance, red light, network interface: MV-ID2013EM-03N-RBN
- 2.45 mm focal length, near distance, red light (polarized), network interface: MV-ID2013EM-03N-RBP

Detection Range

| Focal Length (mm) | Working Distance (mm) | Field of View | | 1D Min. Resolution (mm)* | 2D Min. Resolution (mm) Δ |
|----------------------|--------------------------|---------------|--------|--------------------------------|-------------------------------------|
| | | H (mm) | V (mm) | | |
| 2.45 | 120 | 163 | 130 | 0.12 | 0.29 |
| 4.7 | 120 | 89 | 72 | 0.07 | 0.278 |

Note

- 1D Min. Resolution (mm)*: Field of view (long side) / resolution (long side) \times number of pixels in the minimum bar width (number of pixels in the minimum bar width = 1)
- 2D Min. Resolution (mm) Δ : Field of view (long side) / resolution (long side) \times number of pixels in the side length of minimum module unit (number of pixels in the side length of minimum module unit = 3)
- The integrated cable of the device is a static cable by default that cannot be used in moving scene, such as drag chain. Therefore, it is recommended to fix the cable during installation.